


Wey Check Valve TK 01

6.2.10

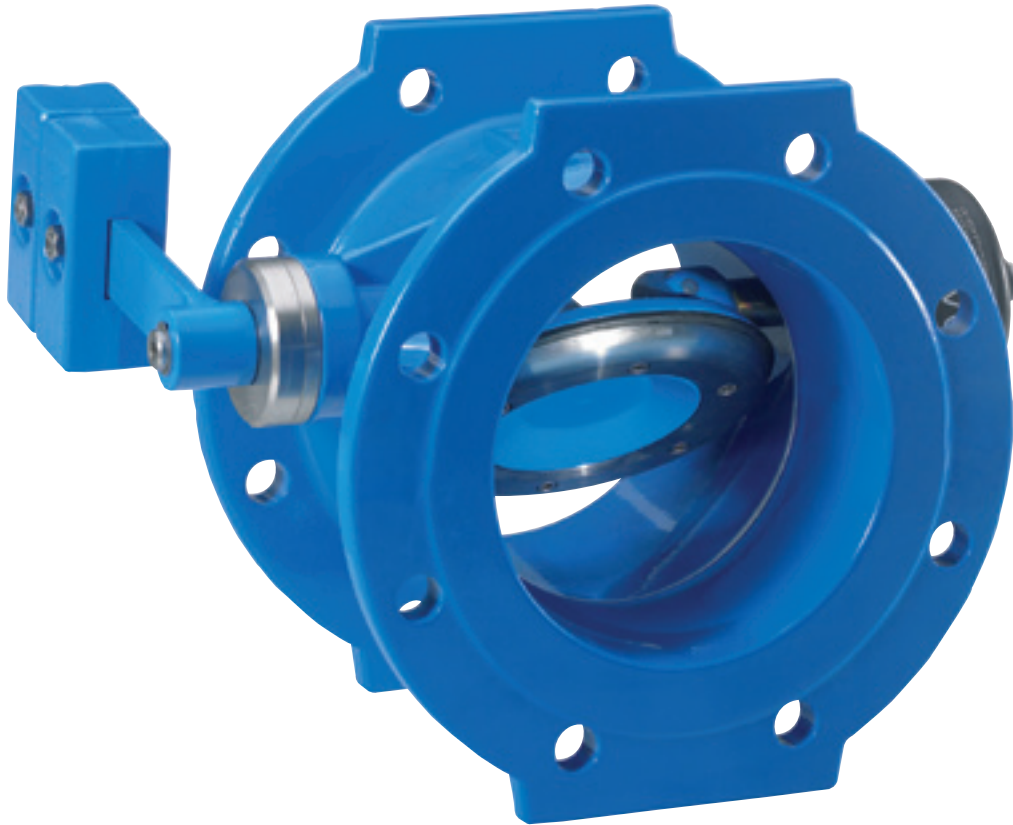

Standard Construction

Body: Ductile Iron EN-GJL-250

Disc: Ductile Iron EN-GJL-250

Corrosion protection: Body and Disc in/outside with EKB
Epoxy powder coating

Shaft: 1.4057, 17% Alloy Steel

Bearing: zincless Bronze, self-lubricating

Seal: EPDM

Nominal pressure: DN 150 – DN 600 max. 10 bar
DN 150 – DN 400 max. 16 bar

Flange drilling PN 10/16 EN 1092 / ISO 7005


Face-to-face EN 558 / ISO 5752 part 14

Test acc. EN 12266-1, rate A

Standard construction: Lever mounting in flow direction RIGHT!

Option: Bracket for pump control

Water reservoir execution

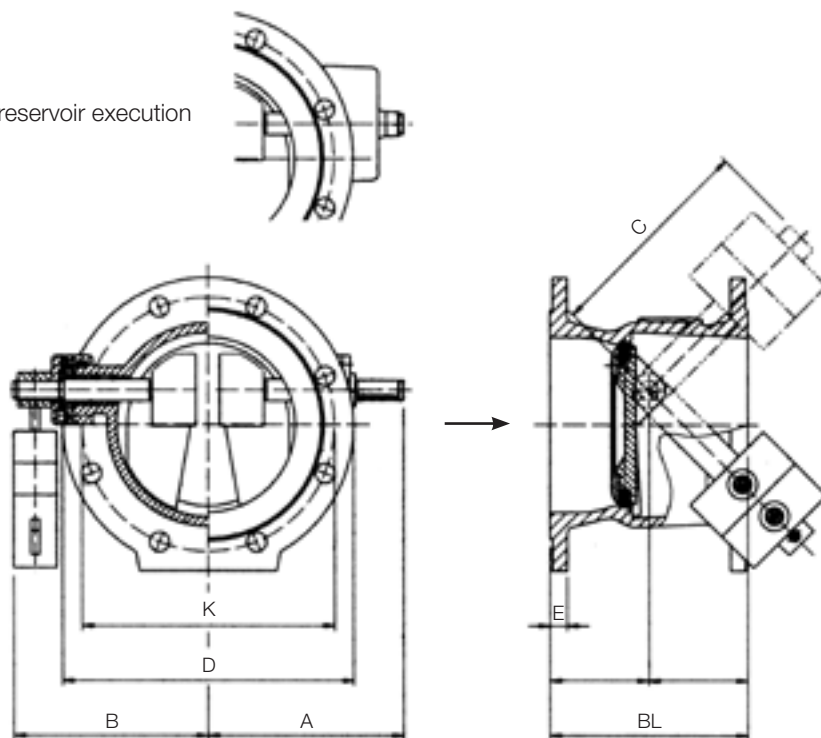

Working pressure max. 10 bar, Flange drilling EN 1092 PN 10

DN	D	K	BL	A	B	C	E	Qty screws
150	285	240	210	218	217	250	19	8 x M20
200	340	295	230	228	227	250	20	8 x M20
250	400	350	250	259	259	300	22	12 x M20
300	455	400	270	308	317	378	25	12 x M20
350	505	460	290	362	367	395	25	16 x M20
400	565	515	310	393	398	490	25	16 x M24
500	670	620	350	445	450	550	27	20 x M24
600	780	725	390	567	567	661	30	20 x M27

Working pressure max. 16 bar, Flange drilling EN 1092 PN 16

DN	D	K	BL	A	B	C	E	Qty screws
150	285	240	210	218	217	250	19	8 x M20
200	340	295	230	228	227	250	20	12 x M20
250	400	355	250	259	259	300	22	12 x M24
300	455	410	270	308	317	378	25	12 x M24
350	520	470	290	362	367	395	27	16 x M24
400	580	525	310	393	398	490	28	16 x M27